

Video Accessories


MK door stations



Dual-call door stations MK-2DA, MK-2DG

MK-2DA & MK-2DG can call two monitors MK-1MD/A selectively. Each monitor is powered by a separate power supply.


- Wide-angle view
- Camera angle adjuster (16° upward)
- Backlit call buttons
- Acrylic nameplates for engraving
- While one monitor is in use, the other monitor is not operational.

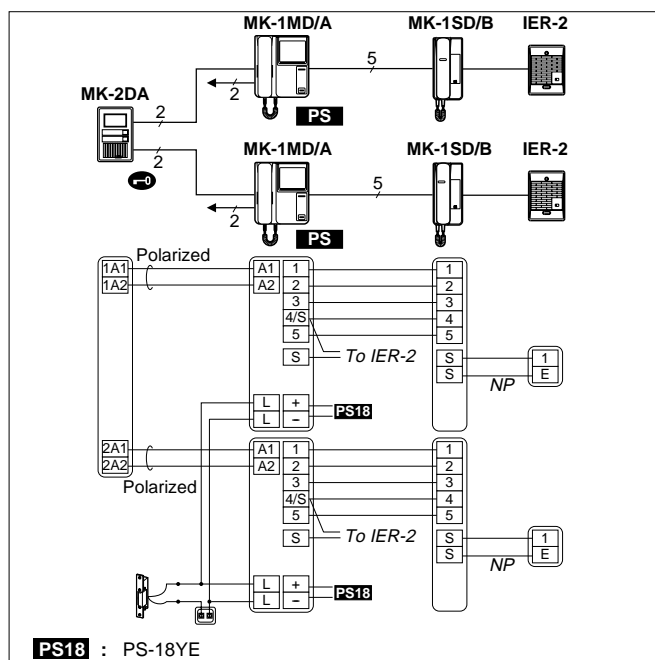


Video door station PP-MK, PP-MKG, PP-MKGH

PP-MK is MK video door station for monitor, which semi-flush mounts on 4-gang box or in entrance pole vertically.


- Wide-angle view
- Camera angle adjust screw (16° upward).

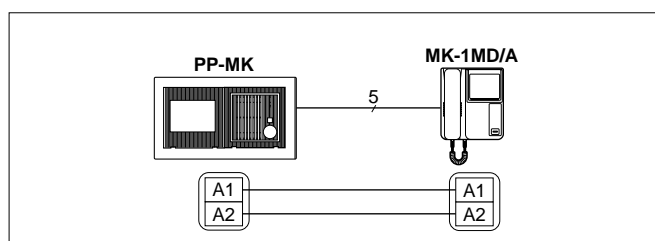

MK-2DA



MK-2DG



PP-MK & PPW-2P







Image view area (approx.) MK-DS/A



Specifications (MK-2DA, MK-2DG)

Power source	Supplied by monitor in use	
Camera	CCD camera w/infrared LED's	
Scanning lines	525 lines	
Minimum illumination	1 Lux at 50cm from camera	
Image view area	70cm Vert. x 110cm Horiz. at 50cm	
Wiring	2 parallel wires, polarized	
Wiring distance	0.65mmø	1.0mmø
• Door to monitor	50m	100m

(PP-MK)

Power source	Supplied by monitor in use	
Camera	CCD camera w/infrared LED's	
Scanning lines	525 lines	
Minimum illumination	1 Lux at 50cm from camera	
Image view area	70cm Vert. x 100cm Horiz. at 50cm	
Wiring	2 parallel wires, polarized	
Distance	0.65mmø	1.0mmø
• Door to monitor	50m	100m